


FASCIA:
1. Remove and replace damaged fascia

HALF LOG SIDINGS:
1. Cleaning
2. Sanding
3. Application of joint sealant
4. Application of wood stain and acrylic solvent-based coating

CONCRETE ROOF TILES:
1. Remove and replace damaged roof tiles

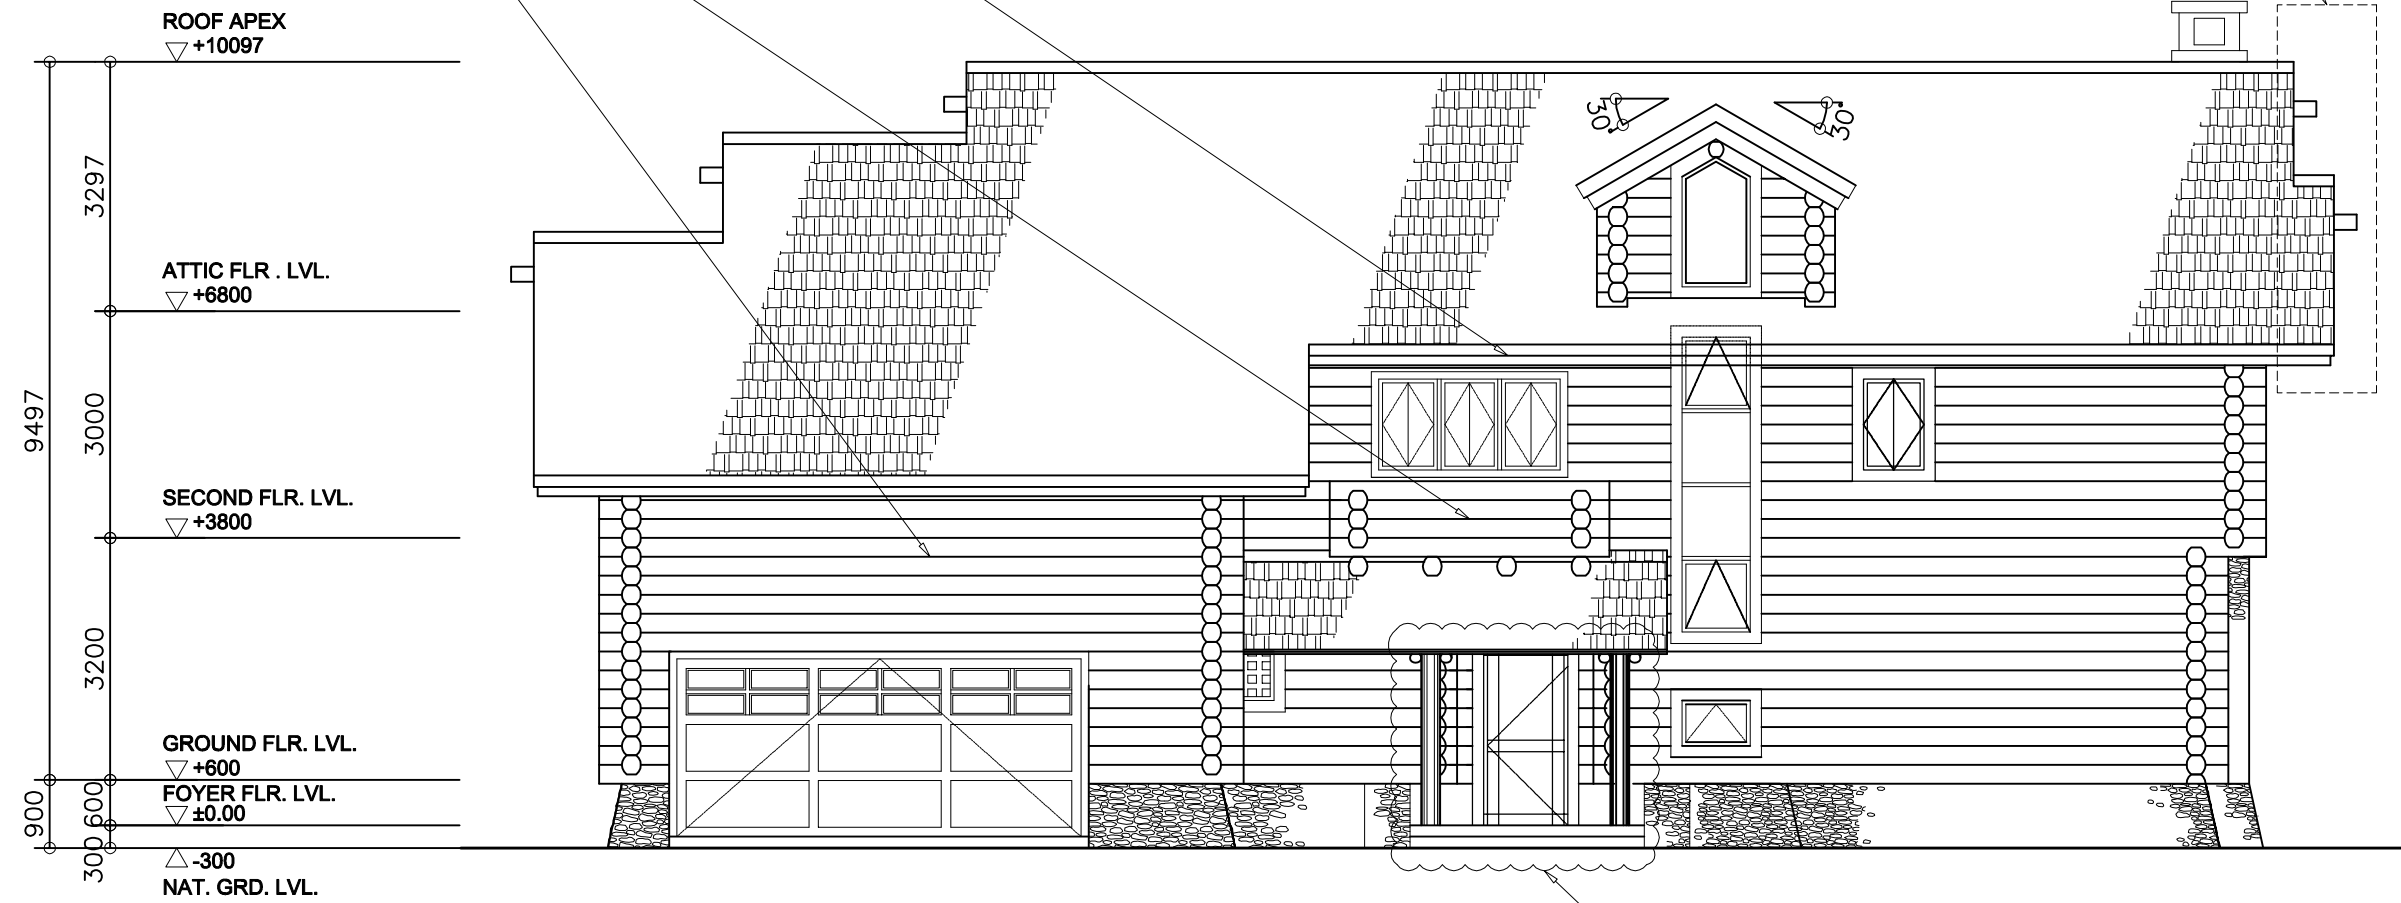

FRONT ELEVATION
SCALE 1:100M

PORCH WOODEN COLUMNS:
1. Remove damaged wooden column
2. Replace with pressure treated wood
3. Include waterproofing at the base of the column

REHABILITATION OF THE MAIN STRUCTURE