


FASCIA:
1. Remove and replace damaged fascia

CONCRETE ROOF TILES:
1. Remove and replace damaged roof tiles

HALF LOG SIDINGS:
1. Cleaning
2. Sanding
3. Application of joint sealant
4. Application of wood stain and acrylic solvent-based coating

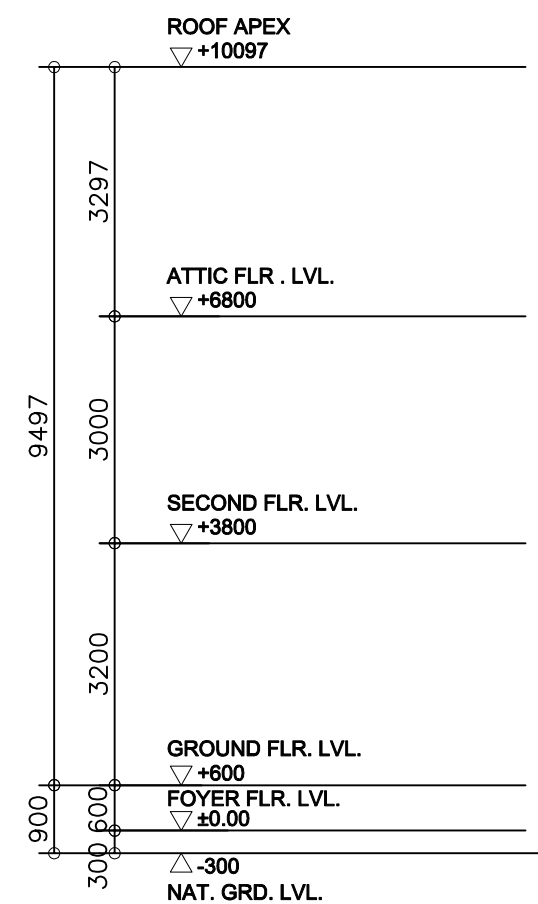

DECK:
1. Remove and replace with pressure treated wood

REAR ELEVATION
SCALE 1:100M

REHABILITATION OF THE MAIN STRUCTURE