


FASCIA:  
1. Remove and replace damaged fascia

HALF LOG SIDINGS:  
1. Cleaning  
2. Sanding  
3. Application of joint sealant  
4. Application of wood stain and acrylic solvent-based coating

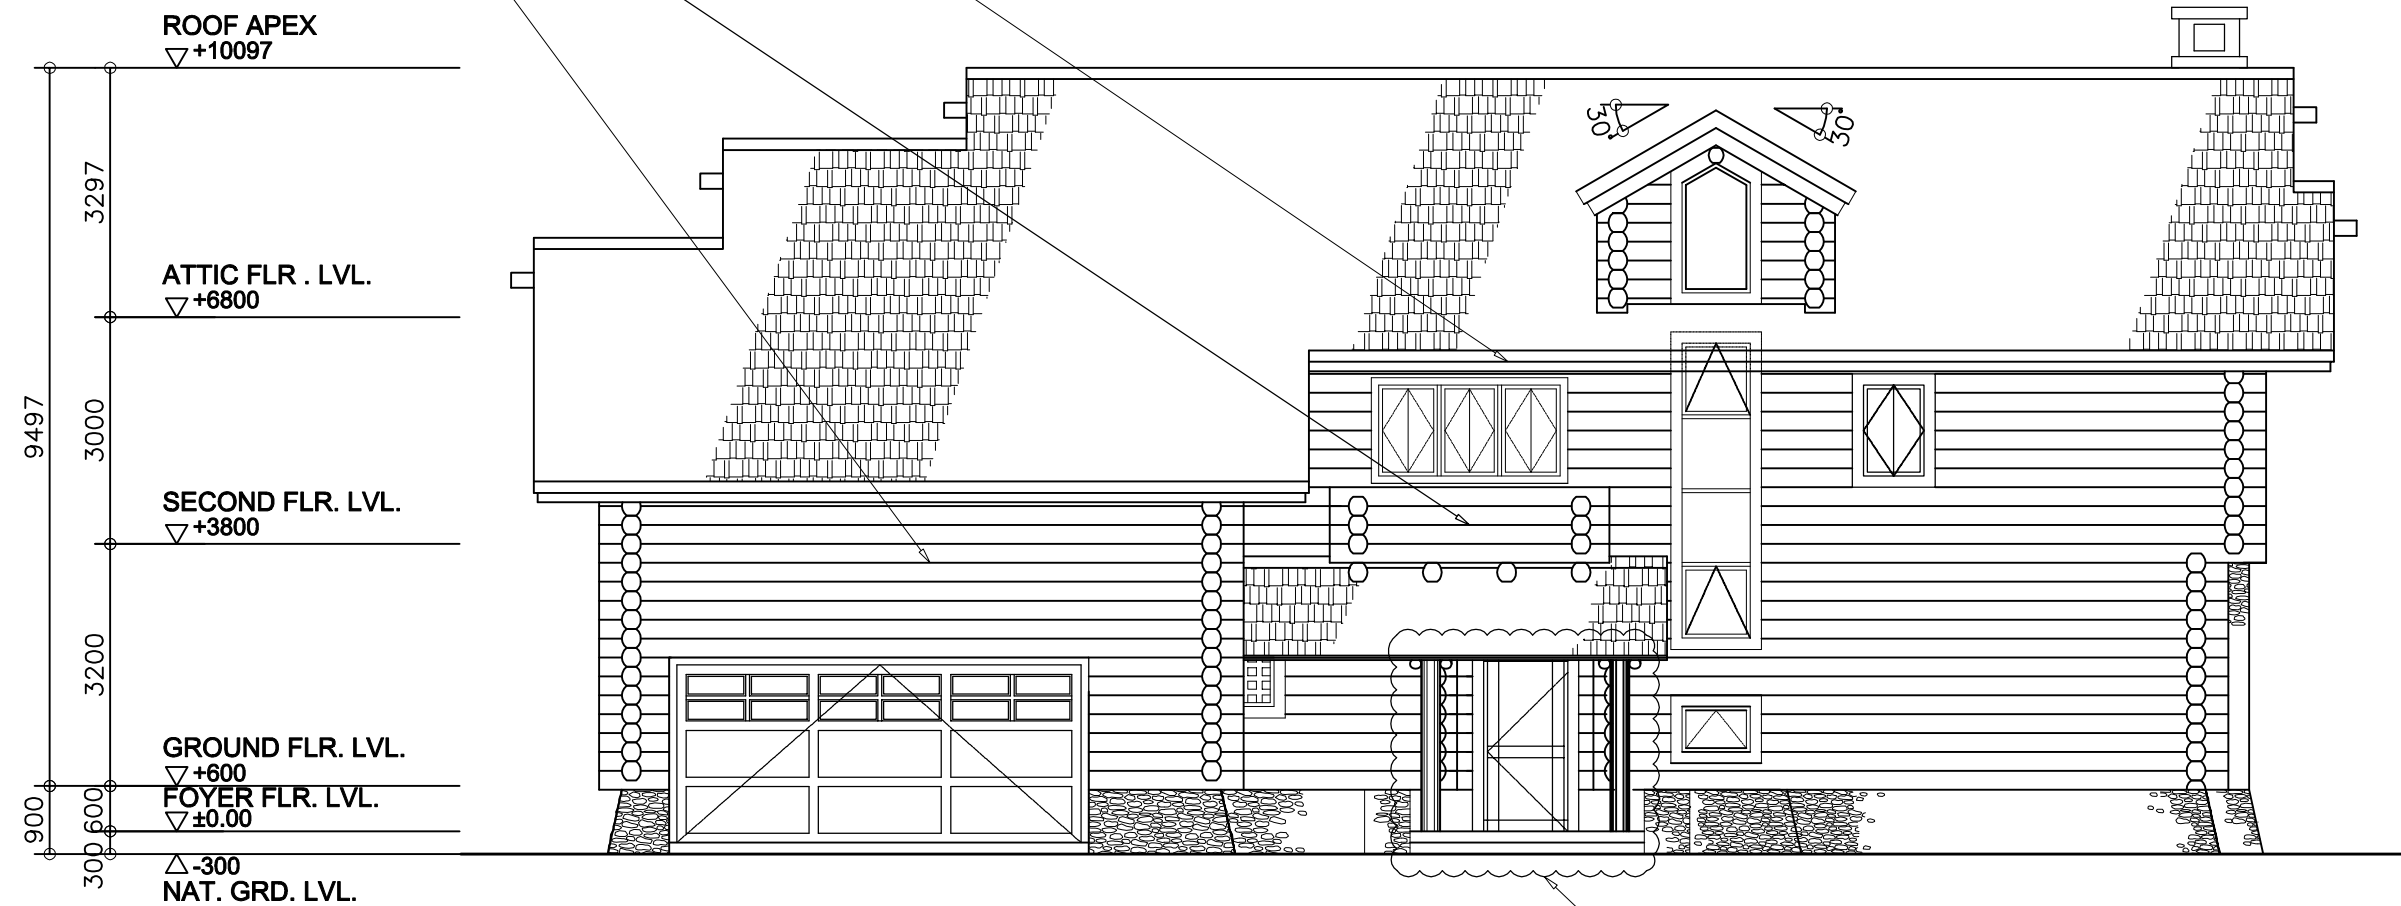

PORCH WOODEN COLUMNS:  
1. Remove damaged wooden column  
2. Replace with pressure treated wood  
3. Include waterproofing at the base of the column

## REHABILITATION OF THE MAIN STRUCTURE